



www.herz.eu

prestige

ПРЕСТИЖ – на шаг впереди конкурентов!

Позвольте побаловать себя дизайном и наивысшим качеством смесителей линии ПРЕСТИЖ.

Встроенный двухступенчатый ECO картридж экономит расход воды и обеспечивает установку максимальной температуры.

HERZ – разница в качестве!

Сантехнические смесители HERZ – это изделия с многолетними традициями производителя и проверенным качеством. На все изделия мы получили большинство важнейших европейских сертификатов качества.

Мы полностью уверены в качестве наших изделий, поэтому обеспечиваем вам гарантию на все однорычажные смесители в течении 6 лет.



Смеситель для умывальника
Basin mixer
Waschtischarmatur



Смеситель для умывальника
Basin mixer
Waschtischarmatur



Смеситель для биде
Bidet mixer
Bidetarmatur



Смеситель для душа
Shower mixer
Brausebatterie

PRESTIGE – one step ahead of the competition!

Spoil yourself with the design and superior quality of sanitary fittings from the PRESTIGE family. The built-in Eco-temp cartridge saves water and enables you to set the maximum temperature.

HERZ – the difference is in the quality!

Sanitary fittings from HERZ are product from a manufacturer with many years' tradition and assured quality. For our products we have acquired the majority of the most important European quality certificates.

We are so confident in the quality of our products that we offer you a **6 year guarantee** on all the single lever fittings.



Смеситель для ванны
Bath shower mixer
Wannenbatterie



www.herz.eu

prestige

PRESTIGE – einen Schritt vor der Konkurrenz!

Verwöhnen Sie sich mit dem Design und der Spitzenqualität der Sanitärarmaturen aus der Familie PRESTIGE. Die eingebaute zweistufige ÖKO Kopplung spart Wasser und ermöglicht Ihnen die Einstellung der maximalen Temperatur.



HERZ – der Unterschied ist in der Qualität!

Die Sanitärarmatur HERZ ist das Produkt eines Herstellers mit langjähriger Tradition und bewährter Qualität. Für unsere Produkte haben wir den Großteil der wichtigsten europäischen Qualitätszertifikate erlangt.

Von der Qualität unserer Produkte sind wir so sehr überzeugt, dass wir Ihnen eine **6 jährige Garantie** auf alle Einhebel-Mischer Armaturen gewähren.

Смеситель для кухни
Sink mixer
Spültischarmatur



Смеситель для кухни
Sink mixer
Spültischarmatur


ООО ГЕРЦ Армaturen
127273, г. Москва,
Сигнальный проезд, д. 19
тел.:
+(495) 617-09-15
факс:
+(495) 617-09-14
e-mail:
offi_ce@herz-armaturen.ru
www.herz-armaturen.ru

ГЕРЦ Украина
02002, г. Киев, ул. А.
Луначарского, 10
тел.: (044) 569 57 07, 08
(многоканальный)
факс: (044) 569 57 09
E-mail:
kyiv@herz-armaturen.
com.ua
Internet:
www.herz-armaturen.com.ua

HERZ Valves UK
Progress House • Moorfield
Point; Moorfield Road •
Slyfield Industrial Estate
Guildford • Surrey • GU1
1RU
Phone: 01483 502211
Fax: 01483 502025
e-mail:
sales@herzvalves.com
www.herzvalves.com

HERZ Armaturen
D-71522 Backnang
Fabrikstraße 76
Telefon:
+49/(0)7191/9021-0
Fax :
+49/(0)7191/9021-79
e-mail:
verkauf@herz-armaturen.de
www.herz-armaturen.de

HERZ Armaturen
Ges.m.b.H.
A-1230 Wien
Richard-Strauss-Straße 22
Telefon:
+43/(0)1/616 26 31-0
Telefax:
+43/(0)1/616 26 31-27
e-mail: offi_ce@herz.eu
www.herz.eu




www.herz.eu

Armature PRESTIGE Bath shower mixer

Data sheet for
00352
Valid 10.2007

00352, 00355

00356, 00357

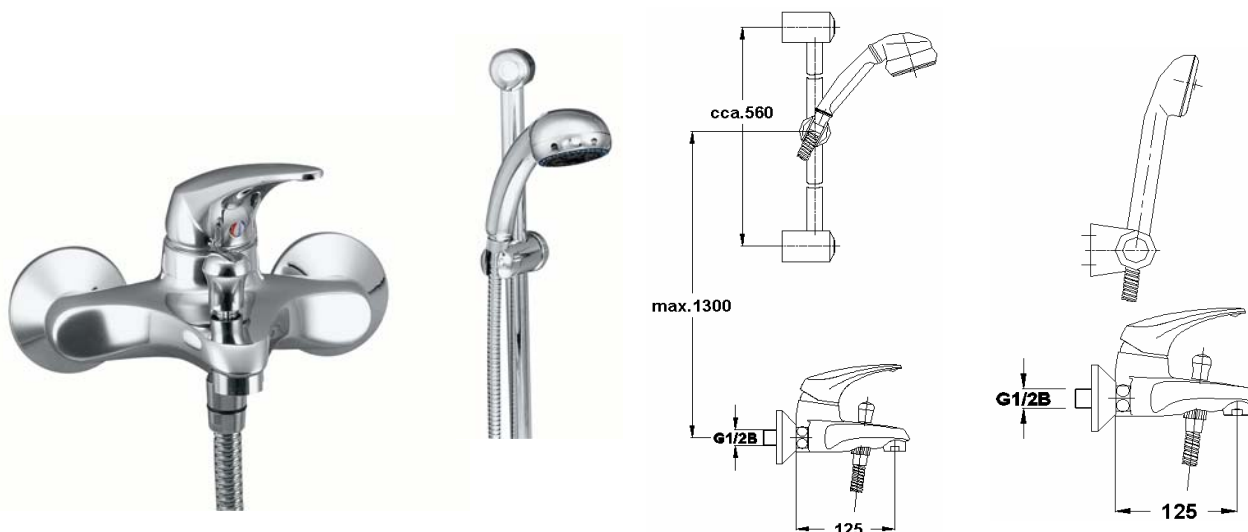

Model:	Colour:		
00352	Chrome		
00355	Satten-Chrome		
00356	Chrome		
00357	Satten-Chrome		
Body: brass acc. EN 1982, chrom plated Cartridge: ϕ 40 mm, Eco-temp cartridge, with warm water flow reduction option Handle: brass, chrom plated Sealing elements: rubber EPDM Diverter switch: automatic			Construction
Eccentric system G1/2			Connections
Working pressure: up to 3 - 5 bar			Recommendable pressure
Working pressure: up to 8 bar			Maximum pressure
Working pressure: up to 0,5 bar			Minimum pressure
Working temperature: 5 - 65°C			Recommendable temp.
Working temperature: 70°C			Maximum temperature
Sanitary armature is used in the high pressure sanitary systems. Eco-temp cartridge, with warm water flow reduction option, economic volume water flow control valve with 2 different levels.			Application
You have to wash out all pipes before assembling. Connect sanitary mixer and primary water pipe with eccentric system. Remove aerator and rotate mixer handle in totally open position. Slowly open pipe valves and manipulate with mixer handle in all positions. Repairing the armature is allowed only performed trade person. After assembling we advice to wash out mixer for an our. We recommended to reduce water pressure over 5 bar with suitable pressure reducer.			Instruction for assembling and maintenance
			We reserve the right to make modifications in line with progress in engineering.




Kovinsko predelovalno podjetje d.d.
Grmaška c.3, 1275 Šmartno pri Litiji, SLOVENIJA

Armature PRESTIGE Kitchen Shink mixer

Data sheet for
00151
Valid 09.2007

00151, 00 01131, 01134

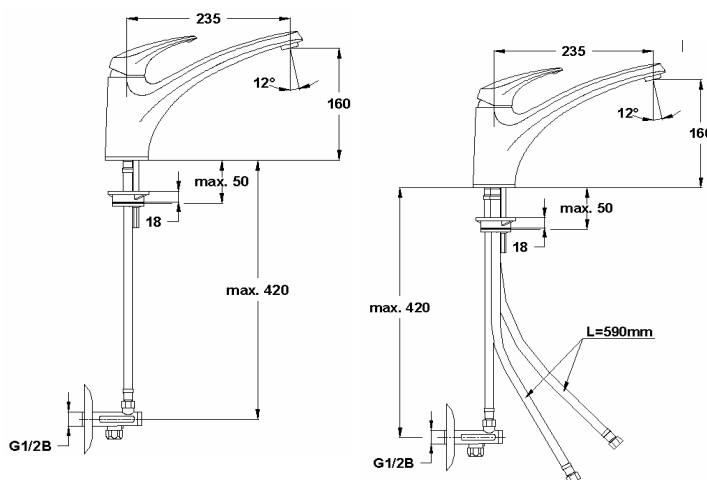

Model:	Colour:	Model:	Colour:
00151	Chrome	01131	Chrome
00152	Antracid-Gold	01134	Sateen
00153	Sateen-Gold		
00154	Sateen		
00155	Chrome-Gold		

Body: brass acc. EN 12164, chrom plated
Cartridge: ϕ 40 mm, Eco-temp cartridge, with warm water flow reduction option
Handle: brass, chrom plated
Sealing elements: rubber EPDM

Construction

Flexible connecting hose for domestic tap fittings G3/8x450

Connections

Working pressure: up to 3 - 5 bar

Recommendable pressure

Working pressure: up to 8 bar

Maximum pressure

Working pressure: up to 0,5 bar

Minimum pressure

Working temperature: 5 - 65°C

Recommendable temp.

Working temperature: 80°C

Maximum temperature

Sanitary armature is used in the high pressure sanitary systems.
Eco-temp cartridge, with warm water flow reduction option, economic volume water flow control valve with 2 different levels.

Application

You have to wash out all pipes before assembling.
Connect sanitary mixer and primary water pipe with flexible hose. Remove aerator and rotate mixer handle in totally open position. Slowly open pipe valves and manipulate with mixer handle in all positions. Repairing the armature is allowed only performed trade person. After assembling we advice to wash out mixer for an our.
We recommended to reduce water pressure over 5 bar with suitable pressure reducer.

Instruction for assembling and maintenance

We reserve the right to make modifications
in line with progress in engineering.




Kovinsko predelovalno podjetje d.d.
Grmaška c.3, 1275 Šmartno pri Litiji, SLOVENIJA

Armature PRESTIGE Basin mixer


Data sheet for
00051
Valid 10.2007




00051, 00054




00061, 00062




00071, 00072




00055, 00056



00063, 00064



00073, 00074



Model:	Colour:	Model:	Colour:
00051	Chrome	00055	Krom
00054	Sateen	00056	Saten
00061	Chrome	00063	Krom
00062	Sateen	00064	Saten
00071	Chrome	00073	Krom
00072	Sateen	00074	Saten

Body: brass acc. EN 12164, chrom plated

Cartridge: ϕ 40 mm, Eco-temp cartridge, with warm water flow reduction option

Handle: brass, chrom plated

Sealing elements: rubber EPDM

Construction

Flexible connecting hose for domestic tap fittings G3/8x450

Working pressure: up to 3 - 5 bar

Working pressure: up to 8 bar

Working pressure: up to 0,5 bar

Working temperature: 5 - 65°C

Working temperature: 80°C

Connections

Recommendable pressure

Maximum pressure

Minimum pressure

Recommendable temp.

Maximum temperature

Sanitary armature is used in the high pressure sanitary systems.

Eco-temp cartridge, with warm water flow reduction option, economic volume water flow control valve with 2 different levels.

Application

You have to wash out all pipes before assembling.

Connect sanitary mixer and primary water pipe with flexible hose. Remove aerator and rotate mixer handle in totally open position. Slowly open pipe valves and manipulate with mixer handle in all positions. Repairing the armature is allowed only performed trade person. After assembling we advice to wash out mixer for an our.

We recommended to reduce water pressure over 5 bar with suitable pressure reducer.

Instruction for assembling and maintenance

We reserve the right to make modifications
in line with progress in engineering.




Kovinsko predelovalno podjetje d.d.
Grmaška c.3, 1275 Šmartno pri Litiji, SLOVENIJA

Armature PRESTIGE Bidet mixer


Data sheet for
00551
Valid 10.2007




00551, 00554



00561, 00562



00571, 00572



Model:	Colour:		
00551	Chrome		
00554	Sateen		
00561	Chrome		
00562	Sateen		
00571	Chrome		
00572	Sateen		
Body: brass acc. EN 12164, chrom plated Cartridge: ϕ 40 mm, Eco-temp cartridge, with warm wather flow reduction option Handle: brass, chrom plated Sealing elements: rubber EPDM		Construction	
Flexible connecting hose for domestic tap fittings G3/8x450		Conections	
Working pressure: up to 3 - 5 bar		Recommendable pressure	
Working pressure: up to 8 bar		Maximum pressure	
Working pressure: up to 0,5 bar		Minimum pressure	
Working temperature: 5 - 65°C		Recommendable temp.	
Working temperature: 80°C		Maximum temperature	
Sanitary armaturen is used in the high pressure sanitary systems. Eco-temp cartridge, with warm wather flowreduction option, economic volume wather flowcontrol valve with 2 different levels.		Application	
You have to wash out all pipes before assembling. Connect sanitary mixer and primary water pipe with flexible hose. Remove aerator and rotate mixer handle in tottaly open position. Slowly open pipe valves and manipulate with mixer handle in all possittions. Repairing the armature is allowed only performed trade person. Affter assembling we advice to wash out mixer for an our. We recommended to reduce water pressure over 5 bar with suitable pressure reducer.		Instruction for assembling and maintenance	
		We reserve the right to make modifications in line with progress in engineering.	



Kovinsko predelovalno podjetje d.d.
Grmaška c.3, 1275 Šmartno pri Litiji, SLOVENIJA